

Leilei Tian
Illusion réelle
2003

cnsmdp-64bits-16042020
2020



The setup and the execution of the electroacoustic part
of this work requires a Computer Music Designer (Max expert).

Table of Contents

Table of Contents	2
Work related information	3
Performance details	3
Detailed staff	3
Realisation	3
Useful links on Brahms	3
Version related information	4
Documentalist	4
Realisation	4
Upgrade Motivation	4
Other version(s)	4
Electronic equipment list	5
Computer Music Equipment	5
Audio Equipment	5
Files	6
Instructions	7

Work related information

Performance details

- Oct. 15, 2003, Paris, Ircam, Espace de projection, rencontres Résonances, concert Cursus

Publisher : Inédit

Detailed staff

- tenor saxophone

Realisation

- Jean Lochard

Useful links on Brahms

- [Illusion réelle](#) for saxophone and electronics (2003), 10mn
- [Leilei Tian](#)

Version related information

Documentation date: April 16, 2020

Version state: valid, validation date : April 16, 2020, update : May 6, 2021, 3:09 p.m.

Documentalist

(jwarnier@free.fr)

You noticed a mistake in this documentation or you were really happy to use it? Send us feedback!

Realisation

- Jacques Warnier (Computer Music Designer)

Version length: 10 mn

Default work length: 10 mn

Upgrade Motivation

Antescofo~, Spat4, and Max8

Other version(s)

- [Leilei Tian - Illusion réelle - transfert-boites \(Sept. 16, 2010\)](#)

Electronic equipment list

Computer Music Equipment

- 1 Retina - *Apple Laptops* (Apple)
- 1 Max 8 - *Max* (Cycling74)
- 1 Fireface UFX - *Sound Board* (RME)

Audio Equipment

- 1 DPA 4099 - *Condenser Microphones* (DPA)
- 6 Loudspeaker - *Loudspeakers*
- 1 Digital Mixing Desk - *Digital Mixers*


Files

File	Type	Author(s)	Comment
IR-64bits-cnsmdp15042020	All-in-one		

Instructions

Instructions :

The electronic of this piece is a max patch with 6 outputs. It needs 6 speakers around the audience.

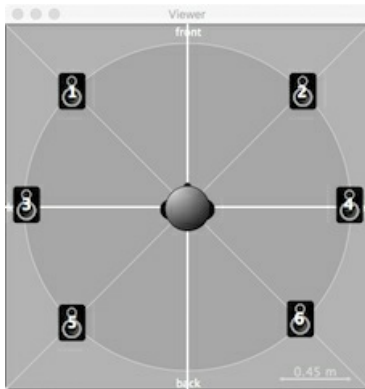

The main part of this piece is a 6 channels electroacoustic soundfile.


Sampling frequency is 44,1kHz.

It includes antescofo~, IrcamSpat 4, CNMAT OSC-route, and two effects made with max native externals. Everything is 64 bits compatible.

Installation :

Unzip the IR-64bits-cnsm dp15042020.zip archive and move its content into the folder of your choice. Choose this folder into the max file preferences path.

This folder content all dependencies needed for the patch max to start :

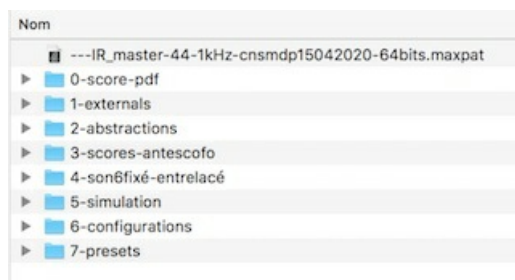

Start :

Open the ---IR_master-44-1kHz-cnsm dp15042020-64bits.maxpat into Max 8.




Follow the 5 steps checklist (1 to 6 orange figures)

1 : Choose a version with or without antescofo~, the Ircam score follower. It is also possible to choose a version with simulation to test this patch without live musician. In sequencer mode a click track is available on output channel 7.

2 : patch initialization. Push the init button or press the « esc key ». This button is also a **Panic button** if audio needs to be cut. (see patch-init sub-patch)

3 : Open the audio status to fix your audio environnement. Choose your audio sound card, and setup the audio status like this :

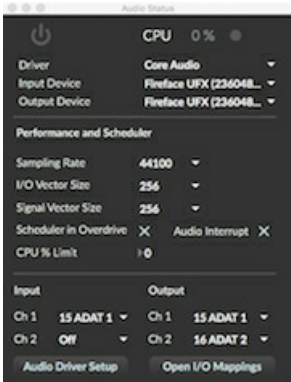

Setup the io mapping like this in an adapt environnement for example :



4 : choose the number of output channels and the input status between simulation or live instrument. Here we chose 6 channel outputs and live instrument in input.


5 : start audio

the patch is ready to start!

The patch react in different ways depending on your version choice. In the present example, « version avec suivi et instrument live », « 6

canaux avec instrument live », pressing space bar starts antescofo~ and few milliseconds later « suivi » is « on ». It's recommended to start synchronized with saxophonist. Few seconds later you will hear the beginning of the hexaphonic sound file.


If you choose a version with simulation, a window with the simulation player appears into screen. Pressing space bar start both simulation playing and antescofo~.

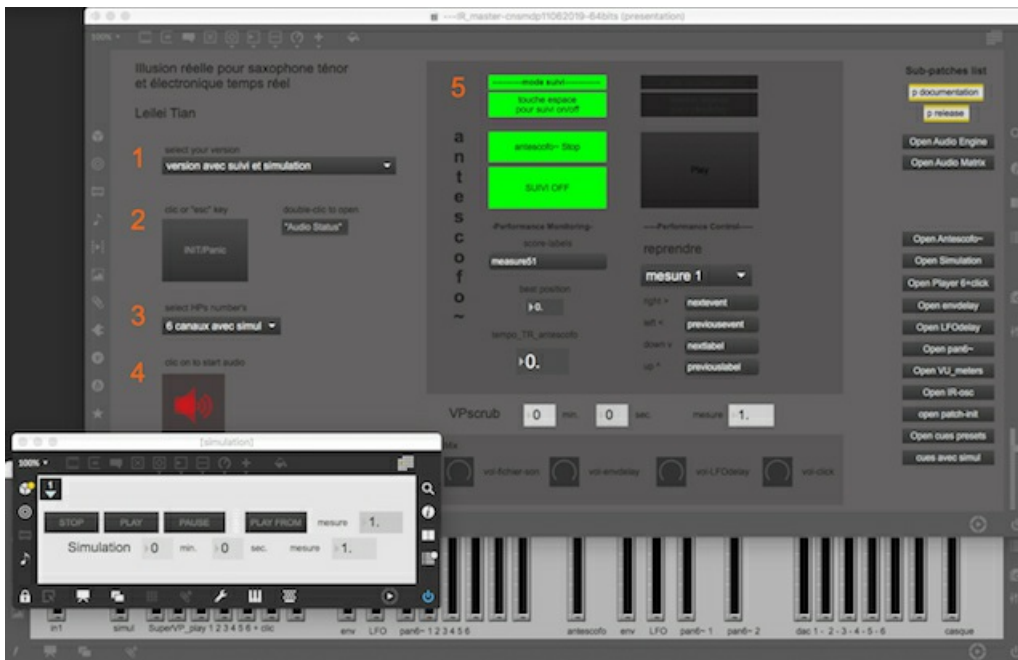

Whenever which version you chose, it's possible to start the piece in several predefined cues.

Enjoy!

Jacques Warnier : jwarnier@cnsmdp.fr

© IRCAM 

This documentation is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).

Version documentation creation date: April 7, 2020, 6:53 p.m., update date: May 6, 2021, 3:09 p.m.