

Yan Maresz
Paris qui dort
2005
2021,

Max8 64bits 48kHz
2021



The setup and the execution of the electroacoustic part
of this work requires a Computer Music Designer (Max expert).

Table of Contents

Table of Contents	2
Work related information	3
Performance details	3
Detailed staff	3
Realisation	3
Useful links on Brahms	3
Version related information	4
Documentalist	4
Realisation	4
Upgrade Motivation	4
Other version(s)	4
Electronic equipment list	5
Computer Music Equipment	5
Audio Equipment	5
Files	6
Instructions	7
Description of the piece:	7
Elements needed to play the piece:	7
Instruments positions:	7
Patch informations:	7
Installation:	7
Max8 instructions:	8
Description of the main patch:	8
Inputs/Outputs:	9
Receiving time code	10
Mira instructions	10
Initialisation:	11
Reaper instructions:	13
Description:	13
Inputs/Outputs:	14
Initialisation:	14
To run the patches for the concert:	15
Before the concert:	15
Mixing indications:	15
Program note	17

Work related information

Performance details

- June 3, 2005, Paris, Auditorium du Louvre, festival Agora
- June 2, 2021, France, Paris, Cité de la Musique

Publisher : édition du compositeur

Detailed staff

- flute, clarinet, cello, trombone, accordion, percussionist, electronic/MIDI keyboard/synthesizer

Realisation

- Benoît Meudic

Useful links on Brahms

- [Paris qui dort](#) music for the film by René Clair (1924), for small ensemble and electronics (2005), 1h15mn
- [Yan Maresz](#)

Version related information

Performance date: Nov. 17, 2018

Documentation date: May 30, 2021

Version state: valid, validation date : Jan. 16, 2022, update : Jan. 16, 2022, 3:48 p.m.

Documentalist

Benoit Meudic (Benoit.Meudic@ircam.fr)

You noticed a mistake in this documentation or you were really happy to use it? Send us feedback!

Realisation

- Yan Maresz (Composer)
- Benoit Meudic (Computer Music Designer)
- Jérémie Henrot (Sound engineer)

Default work length: 1 h 15 mn

Upgrade Motivation

Max8 64bits version

Other version(s)

- [Yan Maresz - Paris qui dort - max7 32bits with video files \(Nov. 19, 2018\)](#)
- [Yan Maresz - Paris qui dort - max5 with video files \(Dec. 14, 2016\)](#)
- [Yan Maresz - Paris qui dort - transfert_mustica_ftp \(April 14, 2010\)](#)
- [Yan Maresz - Paris qui dort - Intel version with optional click track and optional cow bells \(Oct. 15, 2007\)](#)
- [Yan Maresz - Paris qui dort - Creation \(June 3, 2005\)](#)

Electronic equipment list

Computer Music Equipment

- 1 iPad - *Tablets* (Apple)
with Mira
- 1 Reaper - *Music Software* (Cockos)
- 1 Max 8 - *Max* (Cycling74)
- 1 Sound Board - *Sound Board*
for instance fireface 800

Audio Equipment

- 12 Microphone - *Microphone*
for each instruments
- 4 Loudspeaker - *Loudspeakers*
- 1 ear-monitor - *Headphones*
for the clicktrack
- 1 Mixing Console - *Mixing Console*
for instance Yamaha DM1000

Files

File	Type	Author(s)	Comment
_PQD-2021-Max	Patch	Benoit Meudic	max patch
_PQD-2021-Reaper light	Patch	Benoit Meudic	reaper session for sound files and midi triggering
IRCAM-PQD-2018-SETUP AND CHANNEL LIST	Setup	Jeremie Henrot	

Instructions

Description of the piece:


“Paris qui dort”, is a piece written by Yan Maresz for 6 instruments and live electronics on the silent movie “Paris qui dort” by René Clair.

It was created in Auditorium du Louvre on June 2005 (ensemble court-circuit, direction Jean Deroyer, musical assistant Benoit Meudic).

Elements needed to play the piece:

- 1 computer (intel MacBookPro >=2.3Ghz) with max >= 8.0 and reaper >= 6.13 64 bits (for soundfiles, midi instruments and click-track),
- 6 ins/ 5 outs audio interface (for instance fireface 800)
- microphones for each instrument
- 1 mixing console with enough inputs/outputs
- 4 points full band diffusion system.
- 1 reverbs
- ipad with Mira or usb midi mixer (such as bcf 2000).

Instruments positions:

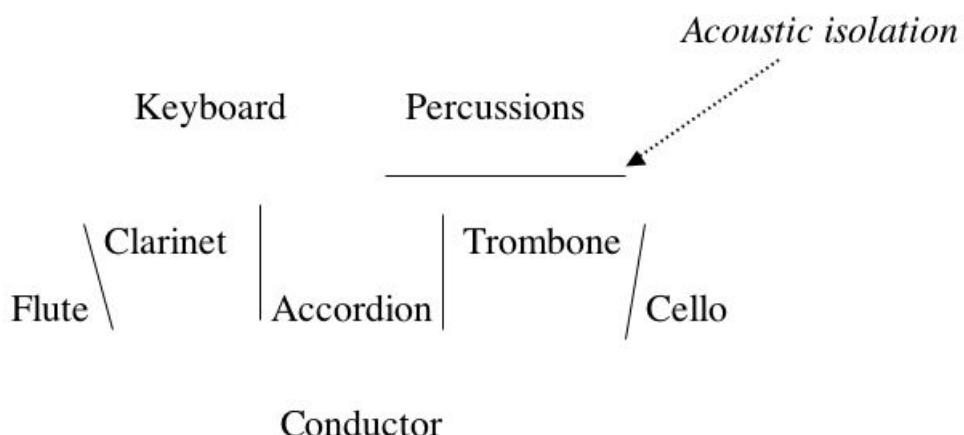

Patch informations:


Installation:

Copy the folder PQD-2021-Max on your hard disk.
Launch max8, and select this folder (and only this one) in the ‘file preferences’ menu.

Open the file *parisquidort2021.maxpat* in max.
 Open the file *_PQD-2021-Reaper-210529* in reaper.


Max8 instructions:

Description of the main patch:

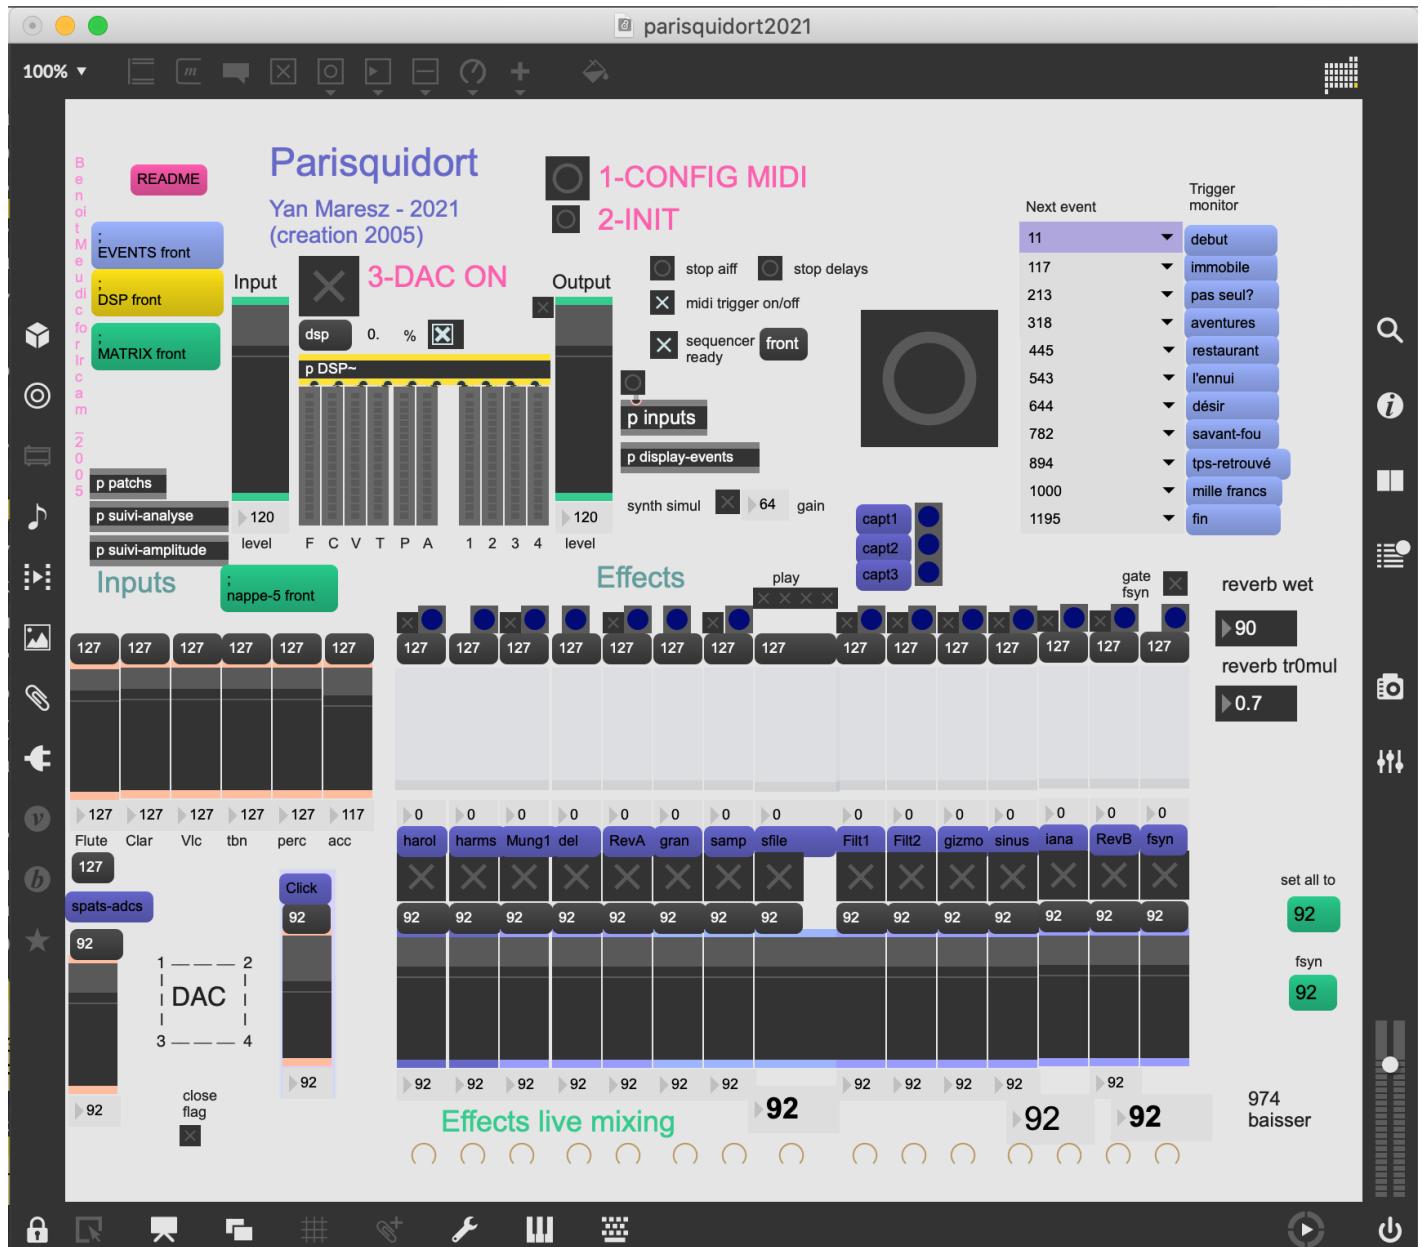

The concert patch is composed of:


- Top right: interface for events triggering. Events are represented by a unique number corresponding to the bar number of the instrumental score. The highlighted number in the menu corresponds to the next event that will be triggered. You can access to the instructions of the events by clicking on the blue message on the right of the event window.

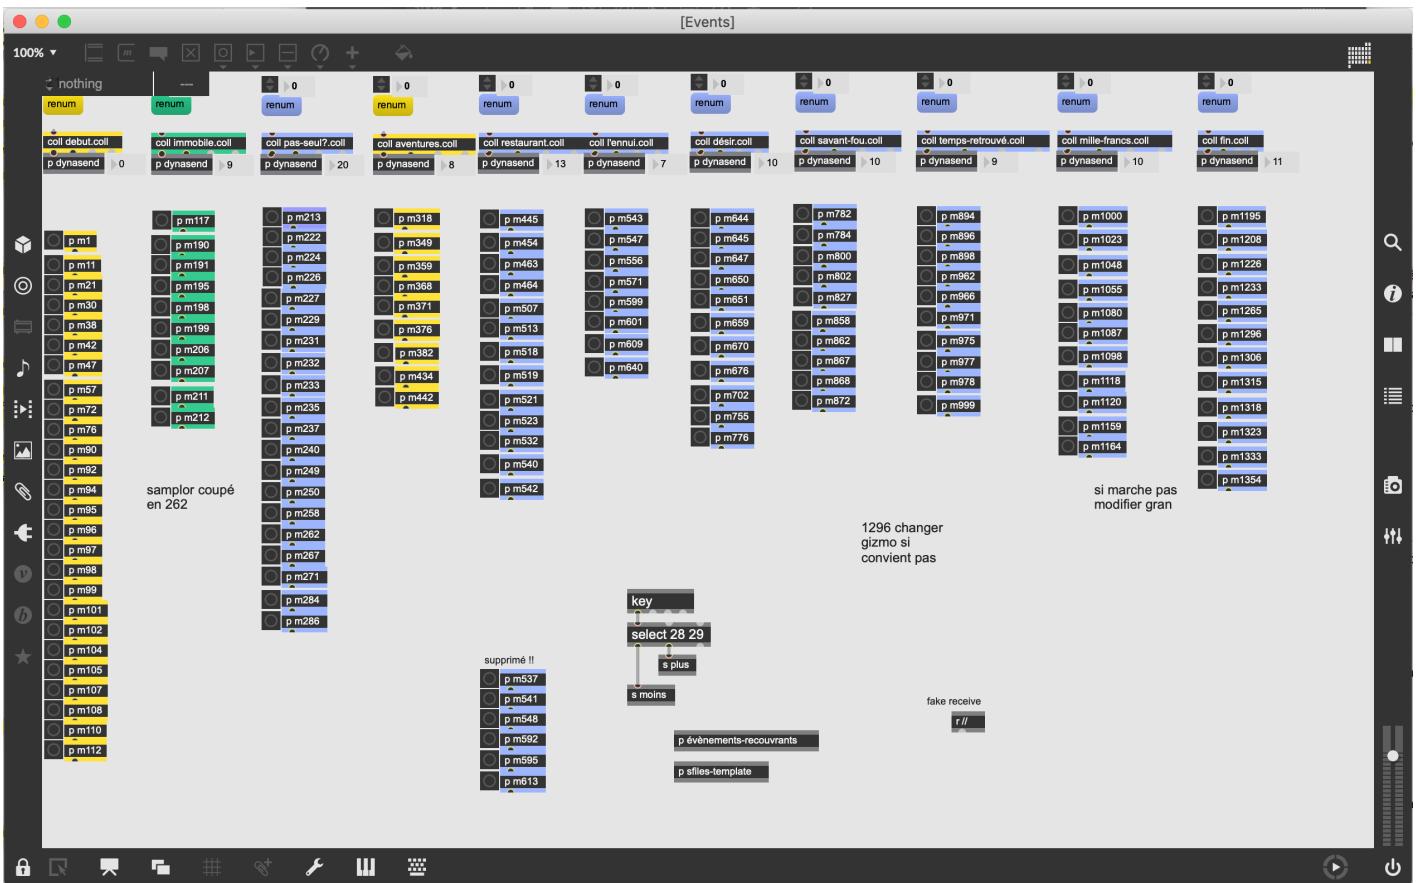

- Top middle: configuration interface (midi communication with reaper and mixing device)
- Top left: main sub-patchers (audio, midi, libraries, events counter, reset, matrix connections).
- Bottom: live mixing faders.

Inputs/Outputs:

There are 6 inputs: flute (fl), clarinet (cl), cello (vc), trombone (tbn), percussion (perc) and accordeon (acc).
There are 4 outputs for live electronics: dac 1..4 for loudspeakers 1, 2, 3 and 4

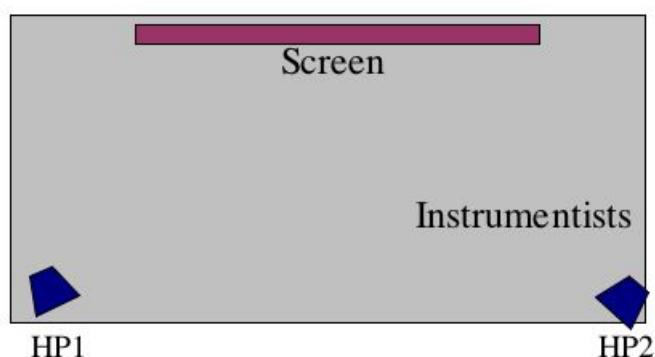


HP3




HP4

Receiving time code

Your audio interface should be connected to the timecode output of the DCP server so as to synchronize the start of the reaper session with the start of the movie.

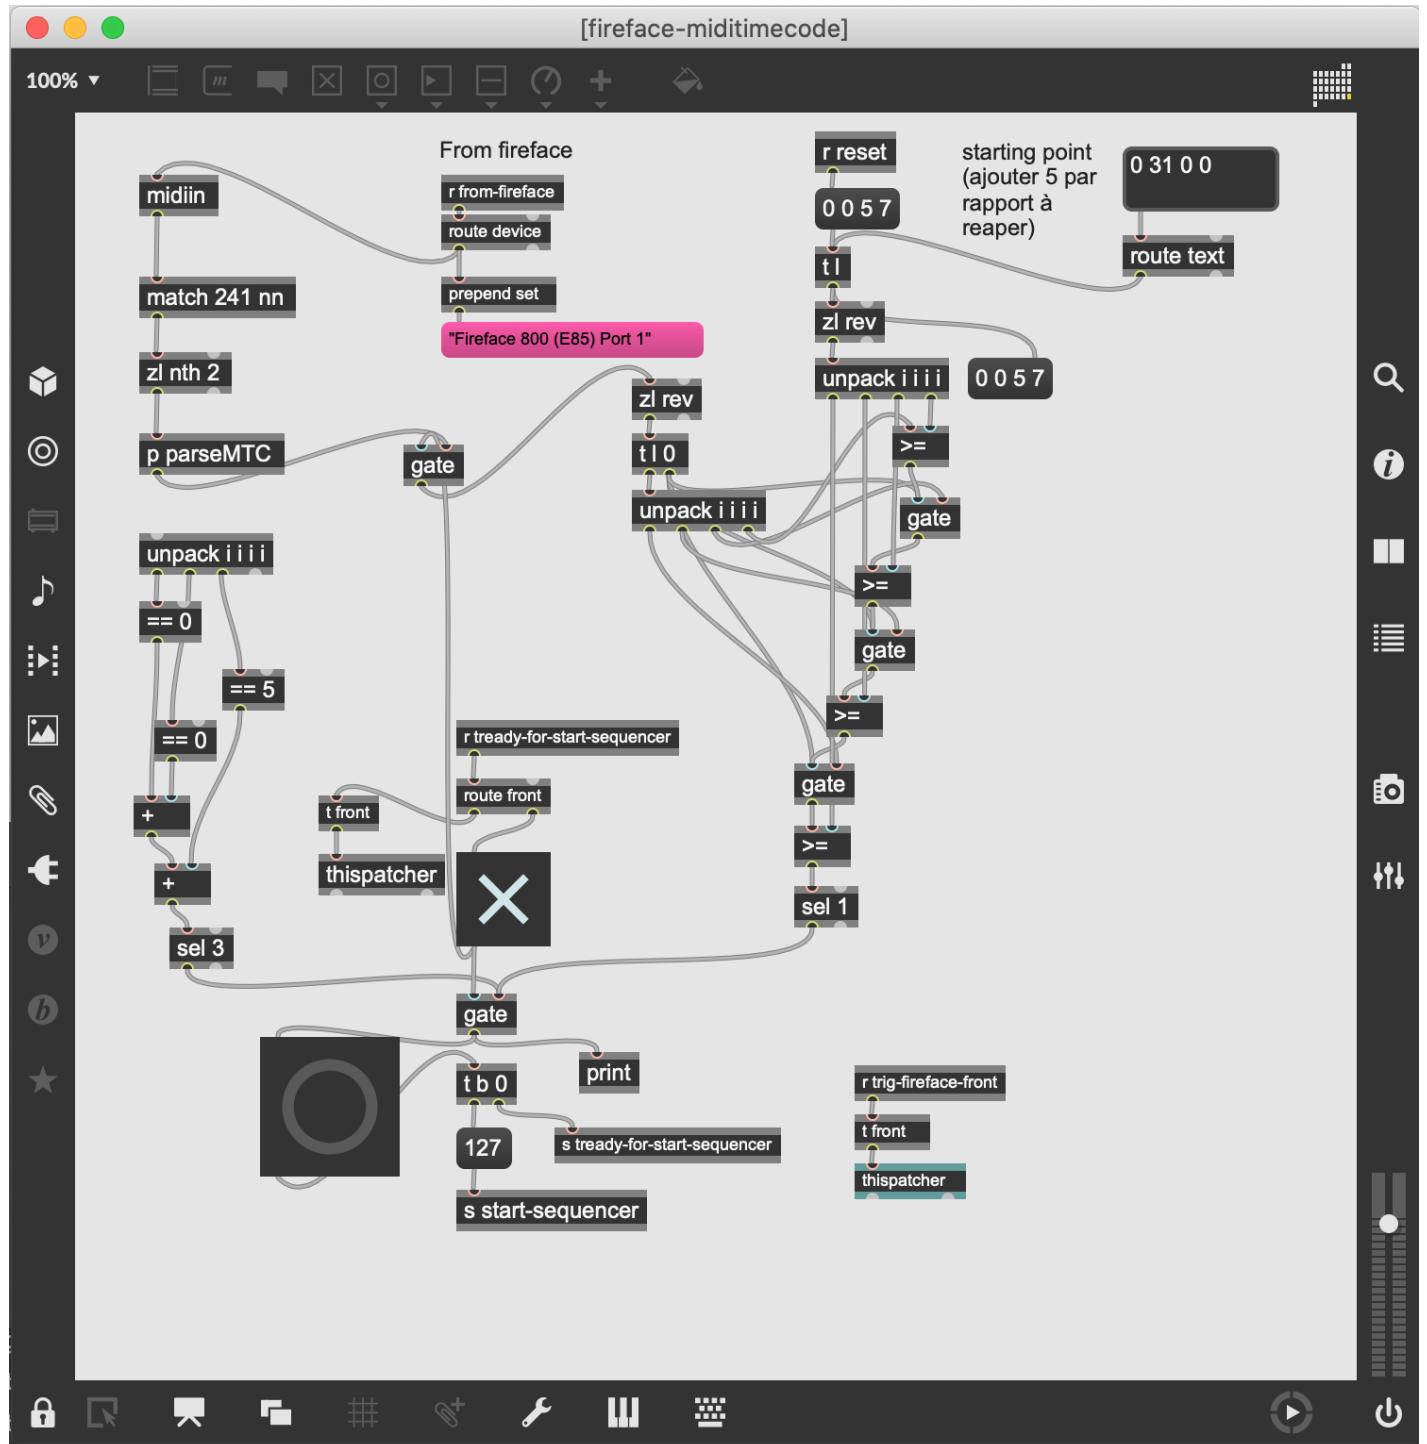

Mira instructions

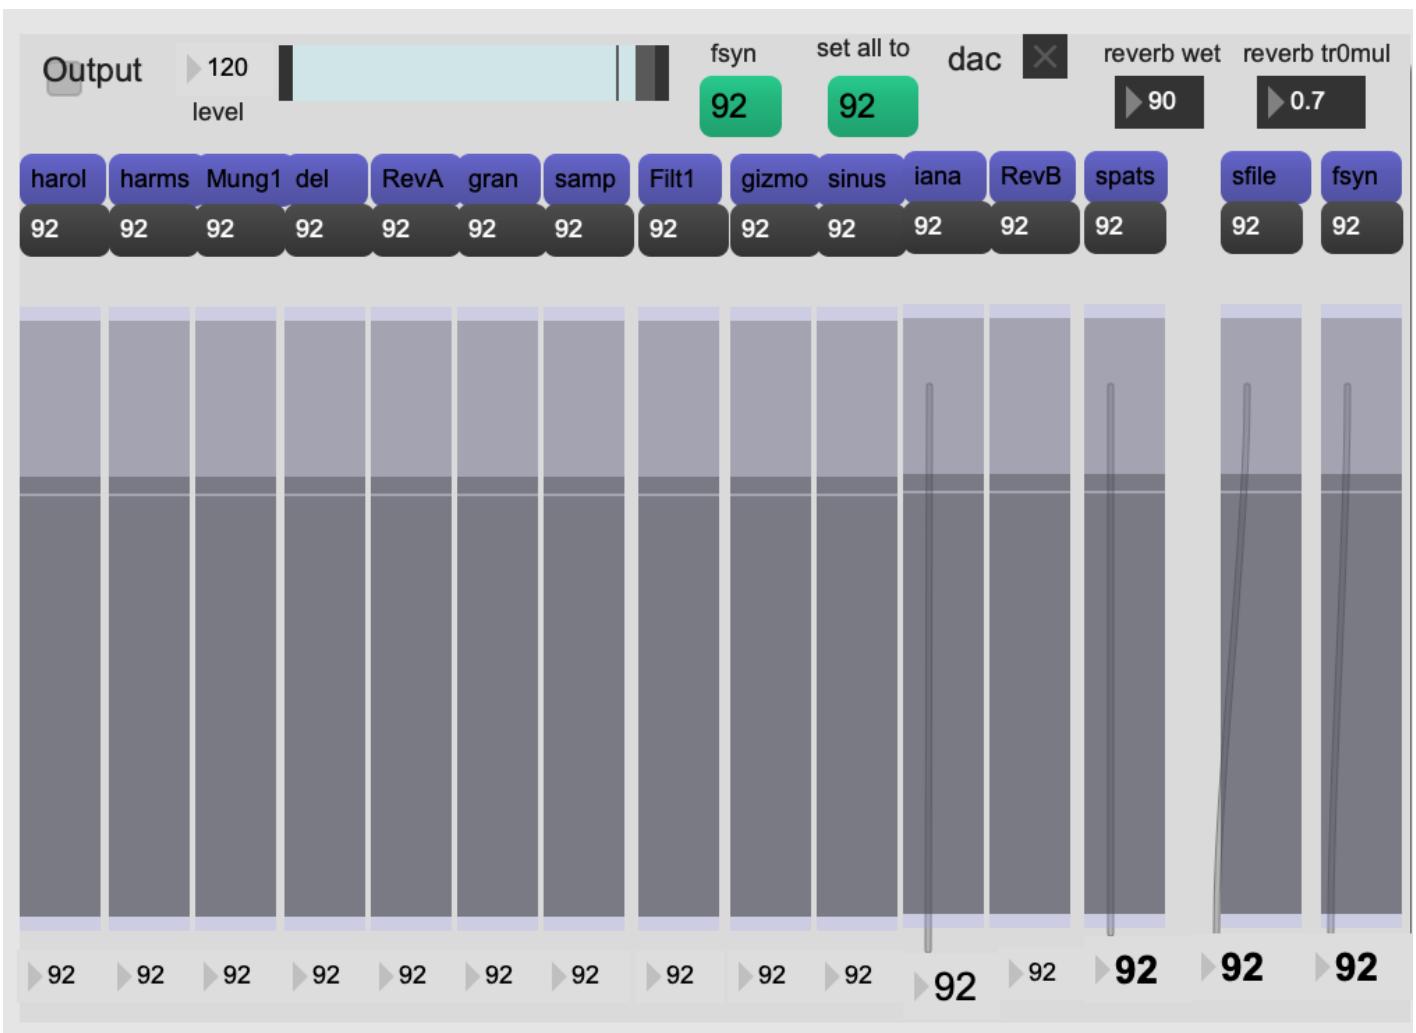

If you use an Ipad for mixing the electronics, you have to install Mira on it.

Then create a local wifi network from your computer and connect the ipad on it. Open Mira and connect to the computer network. The above window should be displayed on Mira.

Initialisation:


To initialize the patch:

1. Click on '1-config midi'


Configure midi devices (reaper, audio device receiving timecode and optionally mixing midi device)

Save the main patch. The configurations will be saved even if you quit max.

If you load the patch again, you will only have to load the sfiles in the 'config patch' window.

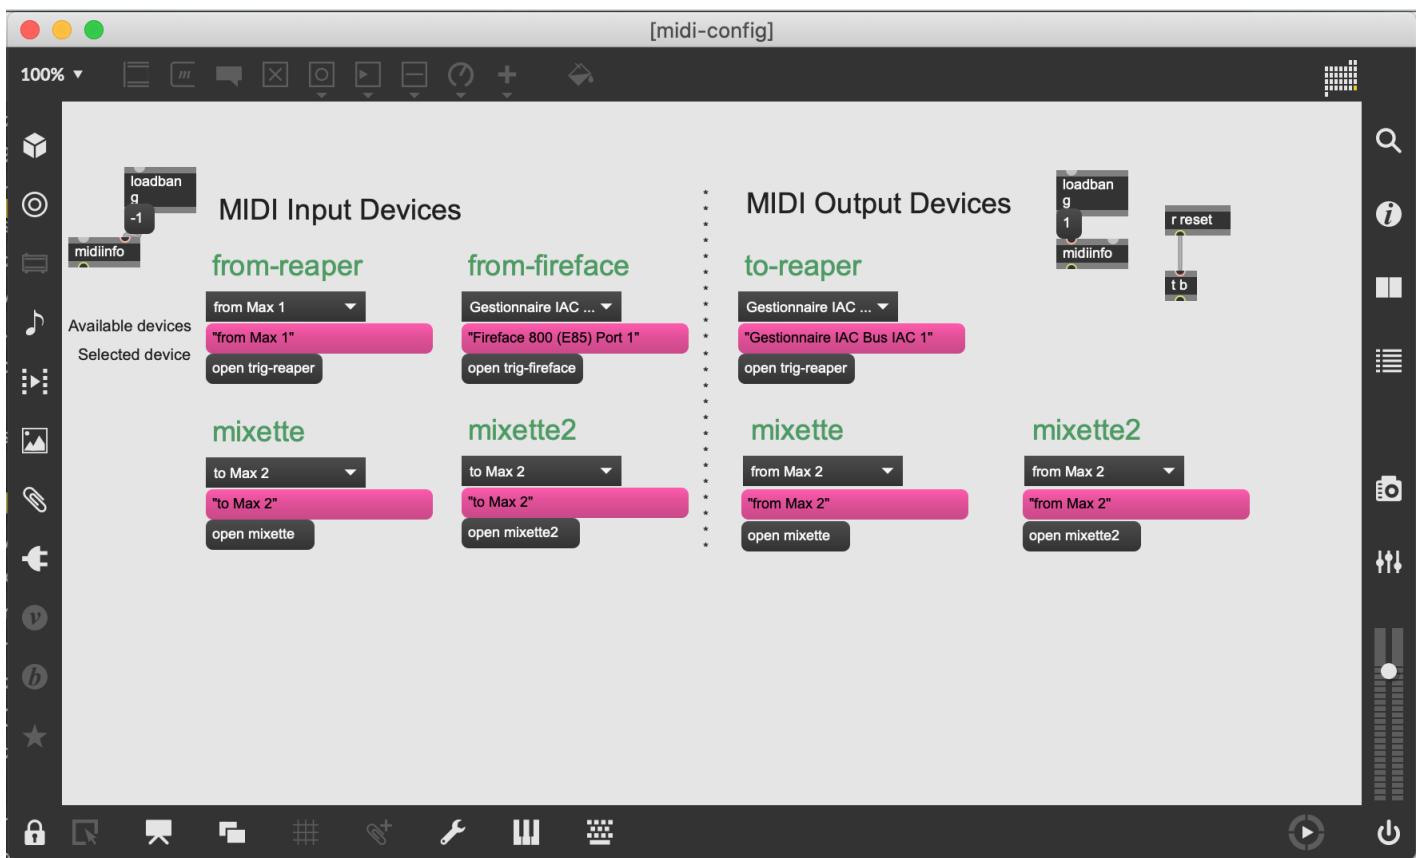


The controller numbers used to control the mix in reaper can be seen in the max window ‘reaper-midi’:

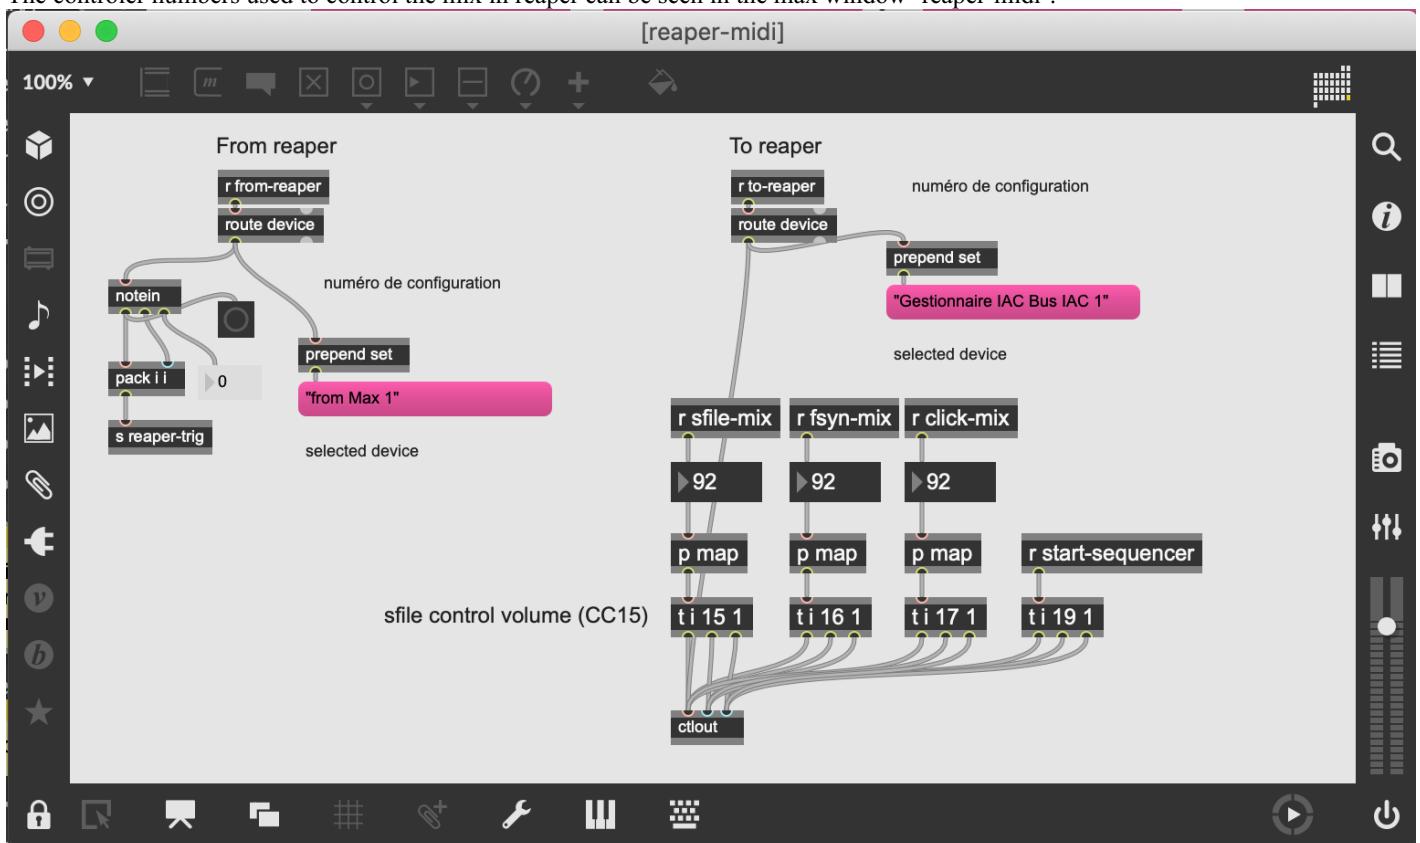

2. Click on ‘2-init’ to reset the patch

The Dsp should be automatically set to sr 48kHz, IOvs 256 and svs 64.

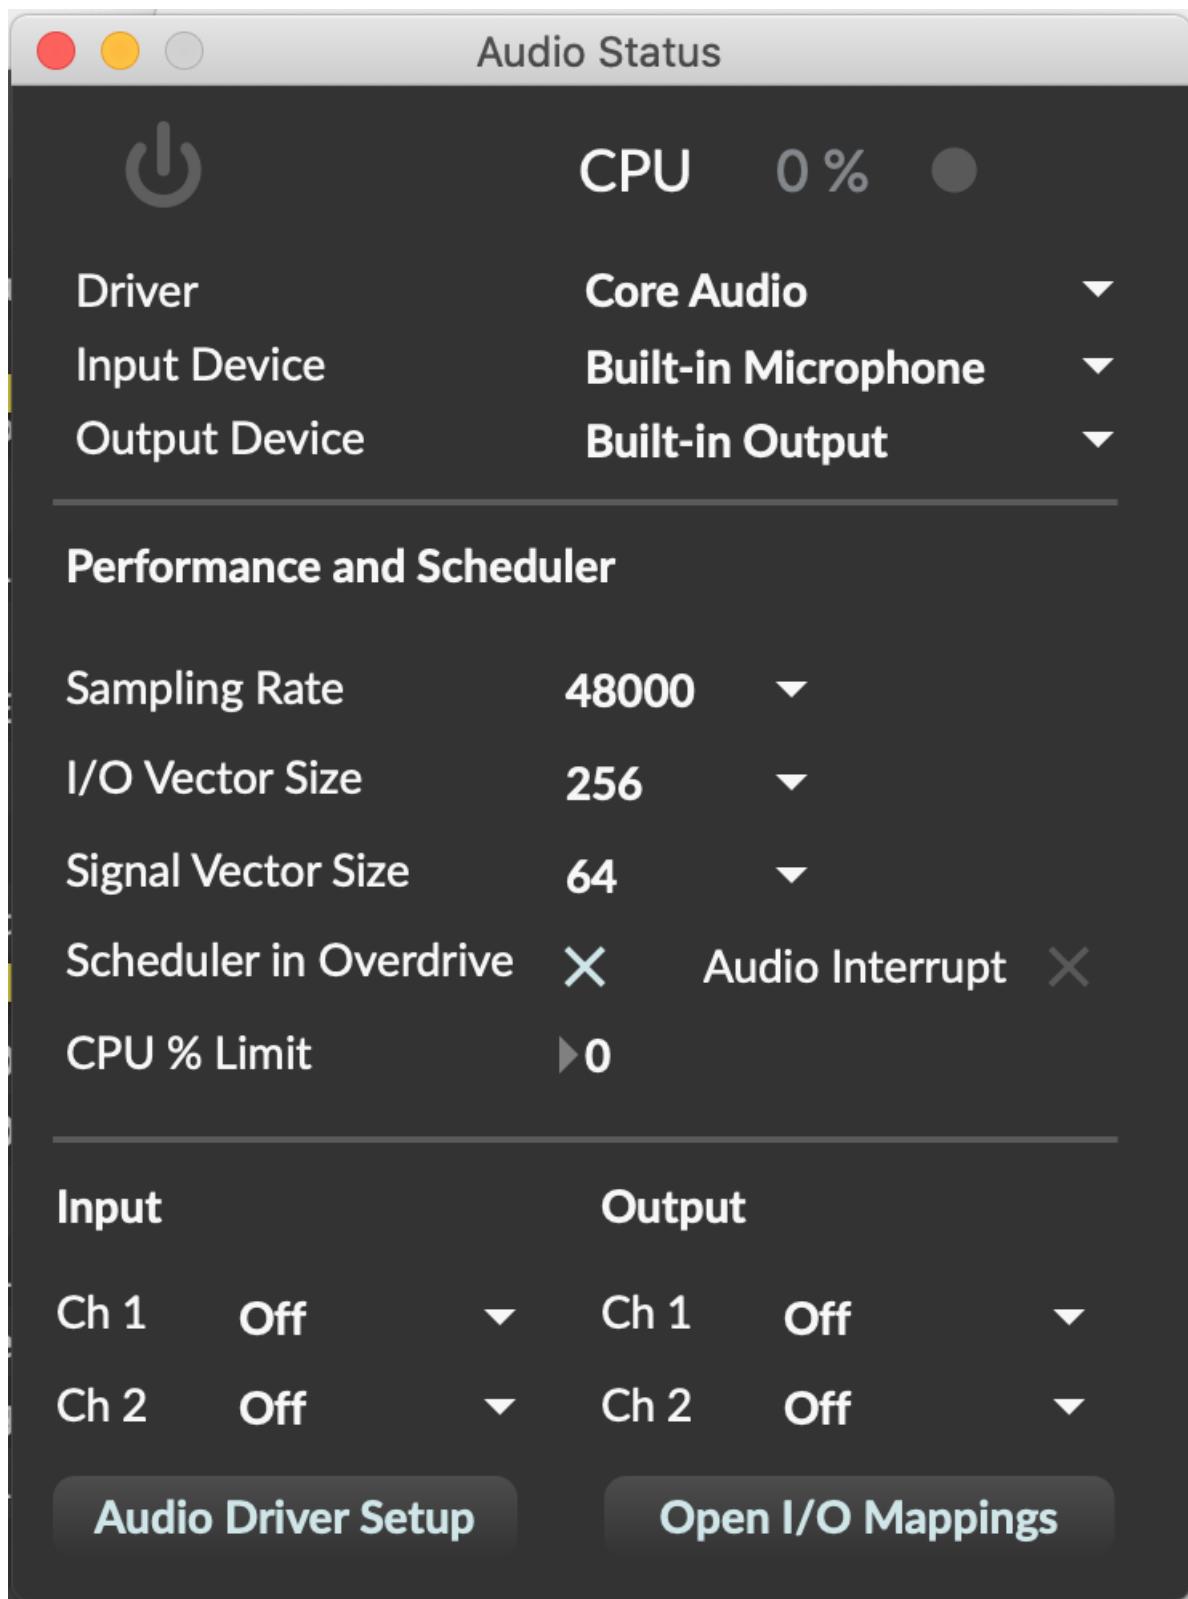


3. turn the DAC on

The first time you use max8, before turning on the dac, you should choose the correct audio driver in the dsp window.

Reaper instructions:

Description:

Reaper is used to play the soundfiles, the click-track and the midi virtual instruments.

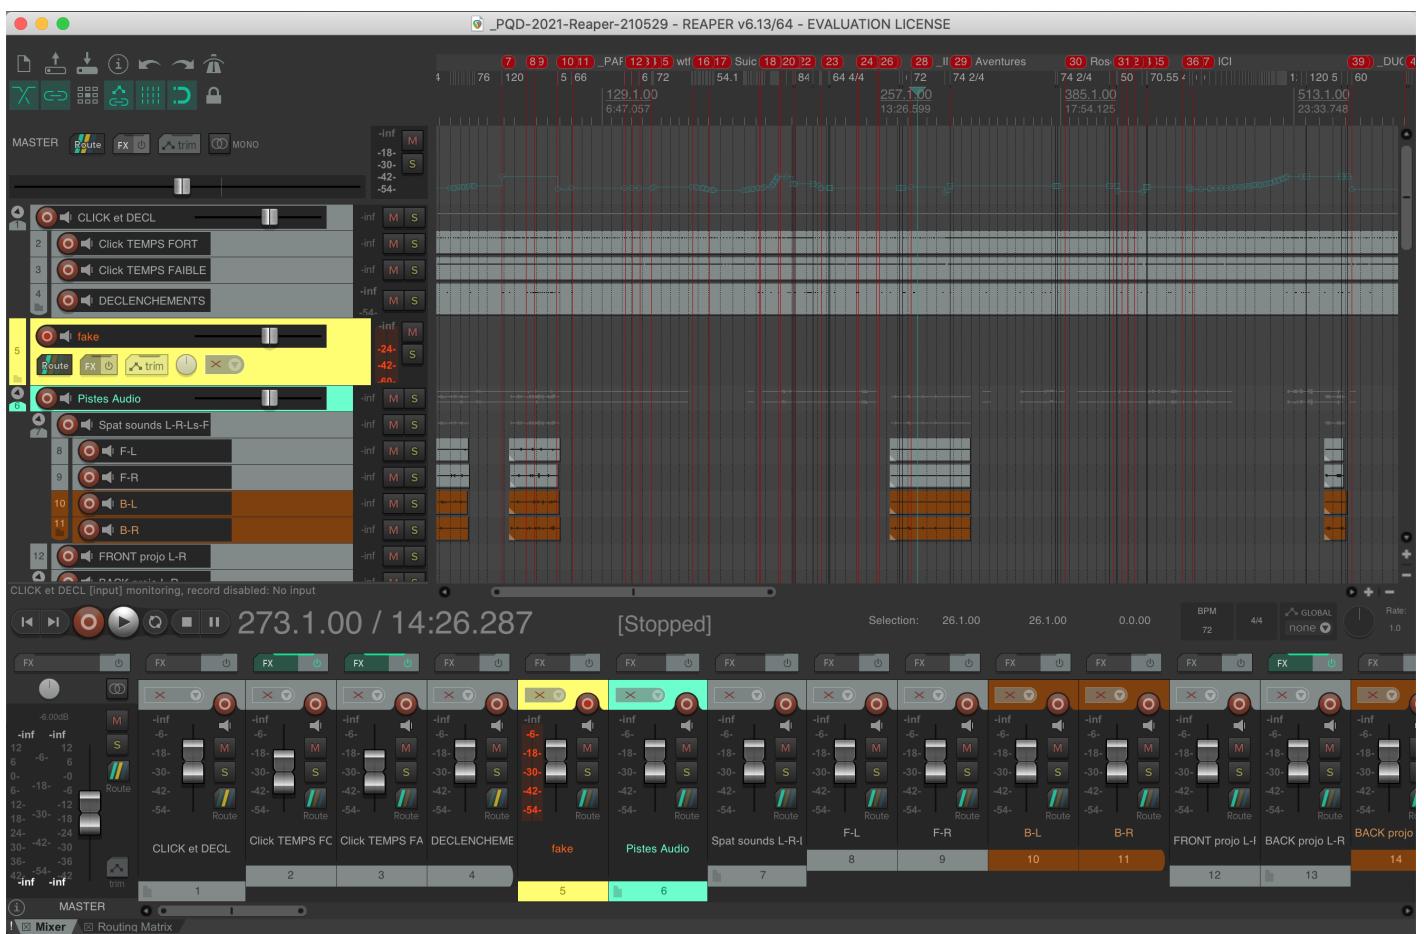

Inputs/Outputs:

The 4 first outputs are for for loudspeakers 1, 2, 3 and 4 and the fifth output is for click-track.

Initialisation:

In the reaper midi preference window, enable the max midi devices so that reaper can receive and send midi from max:

REAPER Preferences

MIDI hardware settings

MIDI inputs to make available (selectable as track inputs and/or learnable or action-bindable):

Device	Mode	ID
Computer, Inc. - IAC Driver - Bus IAC 6	present	
Apple Computer, Inc. - IAC Driver - Bus IAC 7	<not present>	6
Apple Computer, Inc. - IAC Driver - Bus IAC 8	<not present>	7
Apple Inc. - Gestionnaire IAC - Bus 1	Enabled+Control	18
from Max 1	Enabled+Control	28
from Max 1	<not present>	32
from Max 2	<disabled>	29
from Max 2	<not present>	33

MIDI outputs to make available (selectable as track outputs):

Device	Mode	ID
Fireface 802 (23898498) - Port 1	present	
RME - Fireface UC Mac (23431873) - Port 1	<not present>	8
RME - Fireface UC Mac (23431873) - Port 2	<not present>	19
Snoize - QLab	<not present>	29
to Max 1	Enabled	27
to Max 1	<not present>	32
to Max 2	Enabled	28
to Max 2	<not present>	33

Add joystick MIDI...

Reset all MIDI devices

Reset by: All-notes-off Pitch/sustain Reset on: Play Stop/stopped seek

Find Enable the MIDI Input devices you wish to use by right-clicking on the Device name and selecting Enable Input.

OK Cancel Apply

Configure the actions so that you control the gain of the main audio, click and midi tracks from max.
Configure the ‘transport play’ action so that reaper plays when receiving a value of controller 19 from Max.

Actions

Filter: track volume set MIDI

Clear Find shortcut... Section: Main

Shortcut	Description	State
MIDI Chan 1 CC 16	Track: Set volume for last touched track (MIDI CC/OSC only) Track: Set volume for master track (MIDI CC/OSC only) Track: Set volume for selected tracks (MIDI CC/OSC only) Track: Set volume for track 01 (MIDI CC/OSC only) Track: Set volume for track 02 (MIDI CC/OSC only) Track: Set volume for track 03 (MIDI CC/OSC only) Track: Set volume for track 04 (MIDI CC/OSC only)	

To run the patches for the concert:

Before the concert:

Initialise the max8 patch, turn the dac on.

Rewind Reaper

Start the DSP movie.

When the time-code is positioned at (or superior to) 0 0 5 7 max8 should order the reaper session to play.

Mixing indications:

Levels of main treatments should be mixed in real time. Try to make both electronics and amplified sound as homogeneous as possible.

Benoit Meudic, May 2021

Ircam

© IRCAM 

This documentation is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](#).

Program note

La musique pour l'accompagnement du film *Paris qui dort* est conçue comme un contrepoint à l'image avec le souci permanent de servir le film, quel que soit le niveau de complémentarité ou de divergence utilisé. Si elle est contrepoint au niveau temporel, elle est aussi « harmonisation » au niveau plus local, pour ce qui est de la psychologie des personnages. Elle est aussi « orchestration », en tant qu'extension dans le domaine des timbres de l'ambiance spécifique de chaque scène. Le déroulement formel général de la pièce est fourni par la trame cinématographique, et en ce sens, la musique suit assez fidèlement le découpage du film adoptant ainsi son articulation dynamique. Par contre, elle ne suit pas le montage avec précision, mais plutôt anticipe, commente, soutient ou entretient le rythme provoqué par celui-ci.

La thématique centrale d'une temporalité « contrariée », participe à créer autant de refuges « hors du temps », dans lesquels la psychologie humaine, non préparée à l'expérience d'une telle réalité, est explorée avec beaucoup d'ironie et d'humour par René Clair. Le musicien ne peut que se réjouir de cette thématique, car les situations engendrées par le jeu sur le « temps contrarié » dans son écoulement (pour certains seulement) comme le temps figé, ou accéléré, sont des situations éminemment musicales qui trouvent ici pour leur réalisation un espace de déploiement naturel et cohérent.

L'ensemble instrumental, assez inhabituel (flûte, clarinette, accordéon, violoncelle, trombone, percussion, clavier maître) possède une riche palette sonore me permettant d'obtenir la couleur spécifique que je recherchais. L'électronique en temps réel (analyse/synthèse, génération de structures rythmiques « spectrales », extraction des composants « bruitées » du spectre instrumental, transformations diverses, etc...) est utilisée de manière à enrichir et magnifier la matière sonore instrumentale.

Yan Maresz.

Version documentation creation date: May 30, 2021, 12:20 p.m., update date: Jan. 16, 2022, 3:48 p.m.