

Philippe Leroux

*M*

1997

M\_Max8  
2024



---

The setup and the execution of the electroacoustic part  
of this work requires a Computer Music Designer (Max expert).

---

## Table of Contents

Table of Contents	2
Work related information	3
Performance details	3
Detailed staff	3
Realisation	3
Useful links on Brahms	3
Version related information	4
Documentalist	4
Realisation	4
Upgrade Motivation	4
Comment	4
Other version(s)	4
Electronic equipment list	5
Computer Music Equipment	5
Audio Equipment	5
Files	6
Instructions	7
Audio setup	7
Loudspeaker setup	7
Midi setup	8
Software installation	8
Initialization routine	9
Patch presentation	9
Performance notes	10
Program note	11

## Work related information

---

### Performance details

- Oct. 18, 1997, Allemagne, Donaueschingen, festival

Publisher : Billaudot

### Detailed staff

- 2 pianos, 2 percussionists

### Realisation

- Carl Faia

### Useful links on Brahms

- [M](#) for two pianos, two percussions and electronics (1997), 15mn
- [Philippe Leroux](#)

## Version related information

---

Documentation date: Jan. 23, 2024

Version state: valid, validation date : Jan. 26, 2024, update : Jan. 26, 2024, 2:11 p.m.

### Documentalist

yann brecy (yann.brecy@ircam.fr)

You noticed a mistake in this documentation or you were really happy to use it? Send us feedback!

### Realisation

- Frédéric Voisin (Computer Music Designer)

Version length: 15 mn

Default work length: 15 mn

### Upgrade Motivation

Max 8.6 update

### Comment

untested in concert

### Other version(s)

- [Philippe Leroux - M - M\\_Max6 \(Jan. 13, 2014\)](#)
- [Philippe Leroux - M - transfert\\_mustica\\_ftp \(April 14, 2010\)](#)
- [Philippe Leroux - M - OSX update \(Jan. 1, 2005\)](#)

## Electronic equipment list

### Computer Music Equipment

- 1 Max 8 - *Max* (Cycling74)
- 1 Vst reverberation - *Audio Plugin*
- 2 MIDI Keyboard - *MIDI Keyboard*  
large (88 notes)
- 1 MIDI Mixer - *MIDI Mixer*
- 1 Midi interface - *MIDI Interfaces*  
2 inputs 1 output

### Audio Equipment

- 10 Microphone - *Microphone*  
static, for instance: Neumann KM140 and AKG414
- 10 Loudspeaker - *Loudspeakers*  
6 loudspeakers for audience, 4 monitors on stage
- 1 Mixing Console - *Mixing Console*  
Input : 10 mic and 6 lines ; Output : 6 lines + 3 aux

Files

File	Type	Author(s)	Comment
<a href="#">M-Max8.dmg</a>	All-in-one	Frédéric Voisin, Yann Brecy	Patch, lib, sounds, midi files

# Instructions

## Audio setup

2 different audio setups are possible for sound spatialisation, using 6 or 4 loudspeakers. If using only 4 loudspeakers, output 2 and output 5 must be deactivated (same numbers as in “Loudspeaker setup” section below).

Computer (DAC)																	
1	2	3	4	5	6	Piano 1 Hi	Piano 1 Low	Piano 2 Hi	Piano 2 Low	Marmba 1 Hi	Marmba 1 Low	Marmba 2 Hi	Marmba 2 Low	Vibra 1	Vibra 2		
Lignes						Microphones											
																	Out 1
																	Out 2
																	Out 3
																	Out 4
																	Out 5
																	Out 6
																	Aux 1
																	Aux 2
																	Aux 3


6 LS or 4 LS		
LS1	LS1	
LS2		
LS3	LS3	
LS4	LS4	
LS5		
LS6	LS6	

Monitor Piano 1	
Monitor Piano 2	
Conductor	

## Loudspeaker setup


- Original setup

The original loudspeaker setup requires 6 or 4 loudspeakers placed on one line on stage, in front of the audience (LS numbering same as in “Audio setup” previous section) :

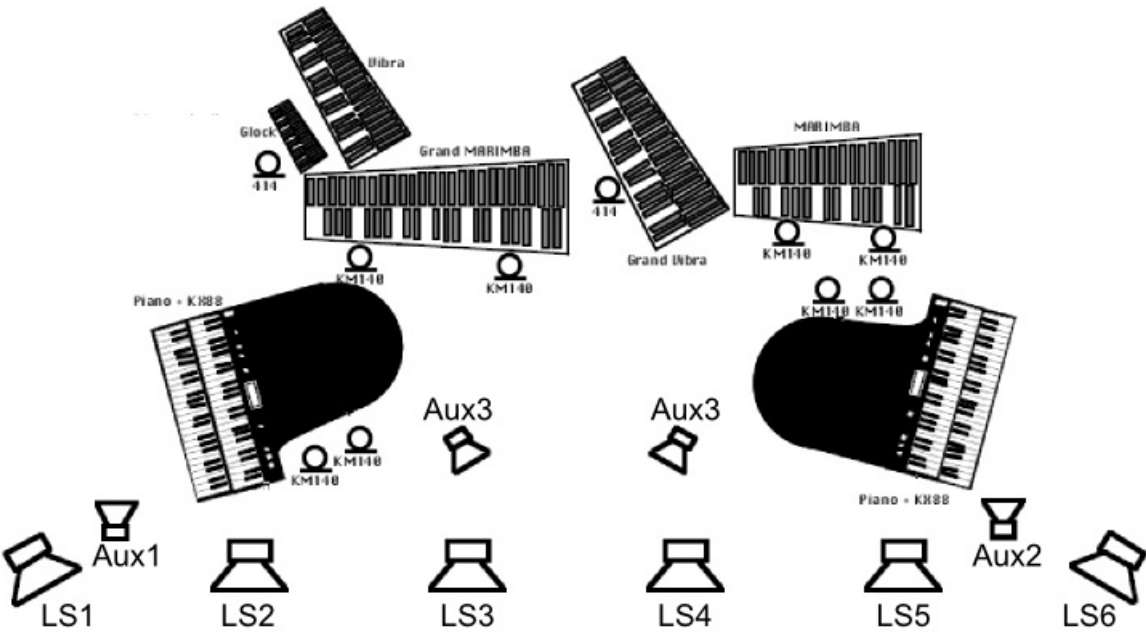


- Surround setup

The composer allows the loudspeakers to be placed all around the audience (LS numbering same as in “Audio setup” previous section) :

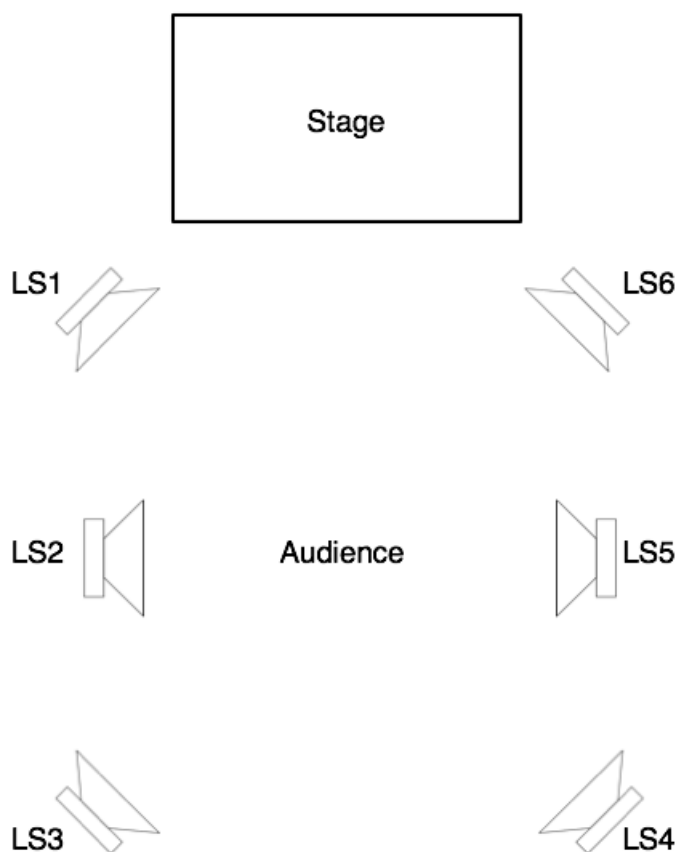

## Midi setup

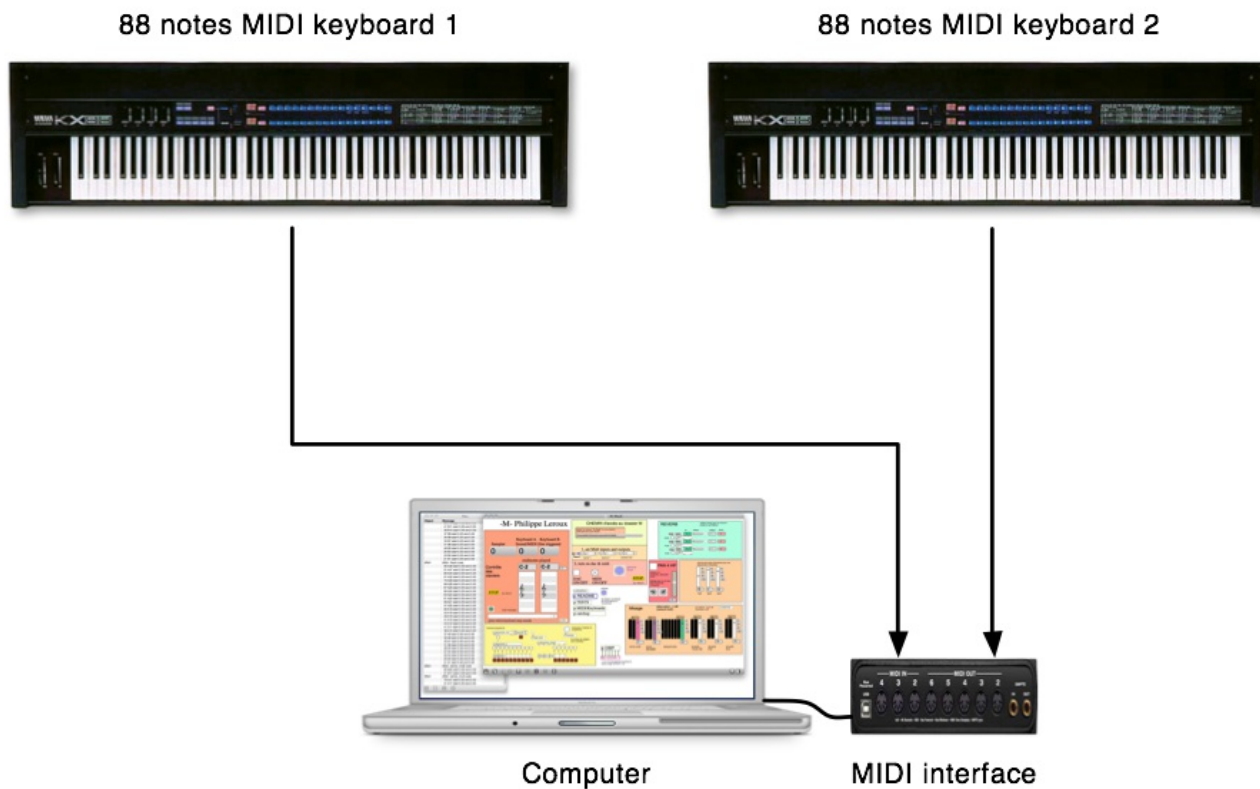

## Software installation

- Download and install Max8 ;
- copy the content of M-Max6.dmg image locally ;



- a VST reverberation plugin effect is required, Wave4® *Renaissance* reverb effect or equivalent (not included in the actual dmg image).

## Initialization routine

1. Load Max 8 and add a path to M-Max8 folder in Option/File Preferences menu ;
2. Load the patcher M-Max8.maxpat ;
3. In Max menu 'Options/Audio status', set sampling rate to 44100Hz and check 'Scheduler in overdrive' (on) ;
4. Check if path for M folder is correct ( 'CHEMIN d'accès au dossier M' patch at window's upper-center) ; **WARNING : the soundfiles will not be loaded if there is a space in the path name**
5. In '-M-Max8' main window, plug VST plugin reverb effects (see 'REVERB' zone at upper-rigth corner) ;
6. Check 'PAN 4 HP' toggle on when using only 4 loudspeakers (see section 'Loudspeakers setup') ;
7. Set MIDI inputs (keyboard and mixer) using the menus in the main patcher (window center, up) ;
8. Check in Audio setup menu if : Overdrive mode is On ;
9. Switch on DSP status using DAC ON/OFF toggle ;
10. Switch on MIDI ON/OFF toggle ;
11. Click on 'general reset' button (see window center)

## Patch presentation

### Main window

**-M- Philippe Leroux**

**FILEPATH FOR MAIN FOLDER -M-**

Drag and drop the "M-Max8" here to conform to your own path  
Desktop/\_MLeroux/M\_Max8/M\_Max8/

**REVERB**

"Bang" to make it default preset

plug open rtd default default store  
mute p rev-1 1 1 1 0  
mute p rev-2 1 1 1 0  
mute p rev-3 1 1 1 0

**PAN 4 HP**

cocher si 4 enceintes, décocher si 6!!!  
réglage pan et vol des deux enceintes "actualisé"

**Mixing**

attenuation - x dB (default=0dB)

In brown : midi control number

Computer Sounds: 9, 10, 11, 12, 13, 14  
Samples sounds: 0, -3, -6, -12  
sequences: 0, -3, -6, -12  
reverb 1-6 (L R): 0, -3, -6, -12  
reverb 2-5: 0, -3, -6, -12  
reverb 3-4: 0, -3, -6, -12

**Polyphony monitor**

bang to init polyphony  
(if all toggle are on)

1 2 3 4 5 6 from left to right (large stereo is 1-6 pair)

**sflist~ status:**

sflist~ cues:

sflist~ 81 B32.wav starttime 0.00 endtime 1081.81  
bidir=0 speed=1.0000

sflist~ 79 B31.wav starttime 0.00 endtime 2810.18  
bidir=0 speed=1.0000

sflist~ 77 B30.wav starttime 0.00 endtime 2810.16  
bidir=0 speed=1.0000

sflist~ 75 B29.wav starttime 0.00 endtime 1005.15  
bidir=0 speed=1.0000

sflist~ 71 B27-22.wav starttime 0.00 endtime 54053.29  
bidir=0 speed=1.0000

sflist~ 69 B26-22.wav starttime 0.00 endtime 74000.00  
bidir=0 speed=1.0000

sflist~ 67 B25-22.wav starttime 0.00 endtime 44970.79  
bidir=0 speed=1.0000

sflist~ 61 B22.wav starttime 0.00 endtime 5562.22  
bidir=0 speed=1.0000

sflist~ 59 B21.wav starttime 0.00 endtime 5020.00  
bidir=0 speed=1.0000

sflist~ 57 B20.wav starttime 0.00 endtime 2575.19  
bidir=0 speed=1.0000

sflist~ 55 B19.wav starttime 0.00 endtime 3139.48  
bidir=0 speed=1.0000

sflist~ 53 B18.wav starttime 0.00 endtime 3155.37  
bidir=0 speed=1.0000

sflist~ 47 B15.wav starttime 0.00 endtime 6016.15  
bidir=0 speed=1.0000

sflist~ 45 B13.wav starttime 0.00 endtime 1017.87  
bidir=0 speed=1.0000


sflist~ 43 B12.wav starttime 0.00 endtime 4899.75  
bidir=0 speed=1.0000

sflist~ 27 B4.wav starttime 0.00 endtime 13600.43  
bidir=0 speed=1.0000


sflist~ status:

sflist~ cues:

### Test window

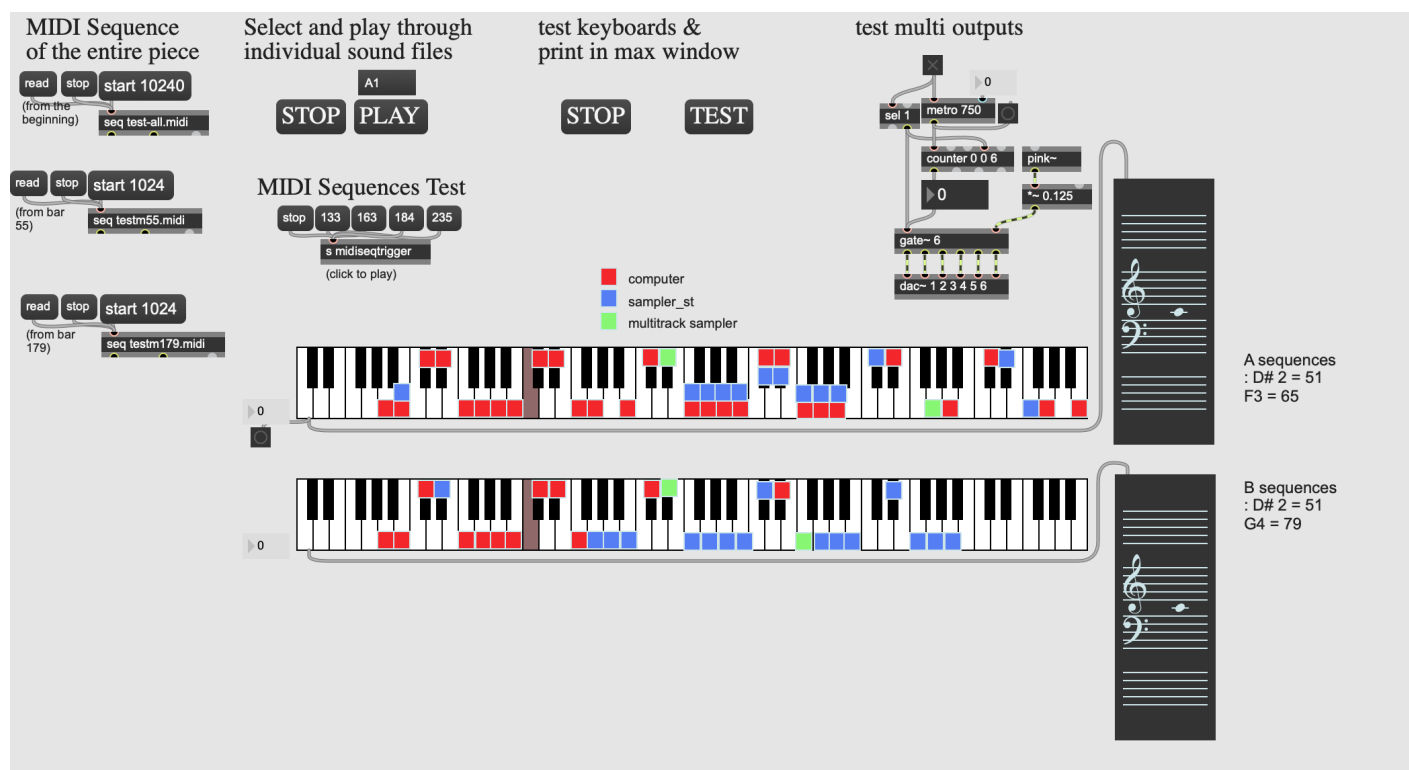

## Catchup window

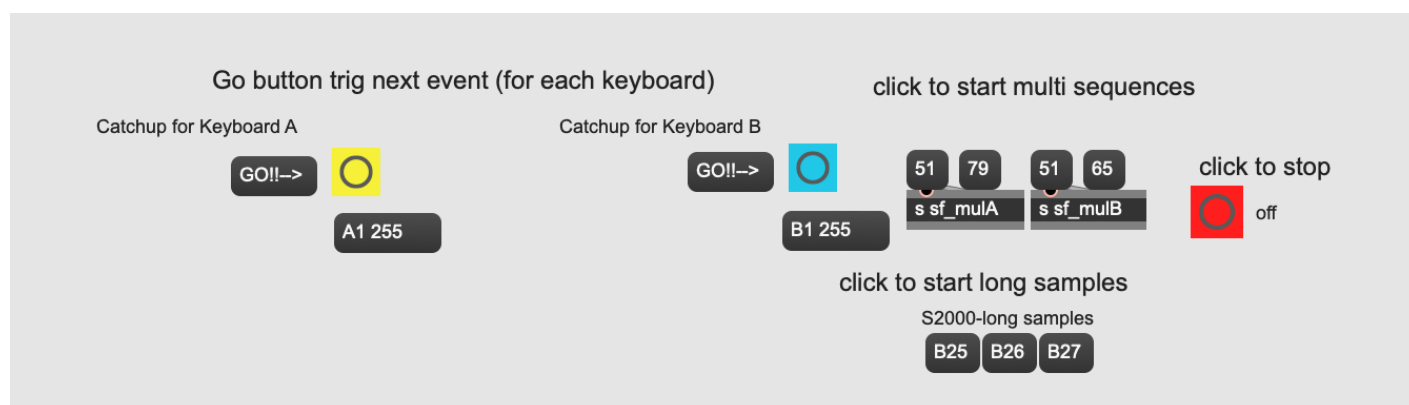

## Performance notes

- Reverberation effects

A reverb (such as PCM 70 used for creation) may be added to the instruments on stage with a reverberation time of 2 to 2.5 seconds.

For the computer part, if not using Wave® Renaissance plugin, 3 reverberation VST plugin effects may be tuned in the 'M-Max8' main window (see upper-right corner, 'REVERB' zone, click on the 'open' button). Then, each reverb preset can be saved using their respective 'store' number box (in red) ; parameters are stored in a separate file when mouse up).

- MIDI Control

On MIDI keyboards, C7 note stops all sounds.

© IRCAM 

This documentation is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).

## Program note

---

Le mouvement — sa naissance, sa mort, l'entretien de l'énergie qui favorise sa durabilité — est l'une des préoccupations de Philippe Leroux. Le principe de continuité qui anime son œuvre procède d'une volonté évidente de logique. Toutes les idées des pièces sont déduites, soit d'un son initial qui porte déjà en lui ses propres développements, soit de processus qui, chauffés à blanc, doivent s'épuiser et mourir. Mais ces mouvements, inverses pour qui voudrait les distinguer, sont toujours complémentaires. En ce sens, on peut écouter ses œuvres comme une métaphore sonore des lois du vivant, pour lesquelles des éléments qui sont détruits en engendrent déjà d'autres dans l'acte de disparaître. Pour Philippe Leroux, la composition peut être envisagée comme un processus d'engendrement, comme une série d'opérations génétiques dans laquelle l'Alpha se confond de manière télescopique avec l'Oméga.

*Dominique Druhen.*

Pour la réalisation de la partie informatique, nous avons d'abord commencé par analyser quelques résonances de piano à l'aide des logiciels AudioSculpt et Patchwork, développés à l'Ircam. Ces résonances, évidemment riches en partiels, sont parfois étrangement inharmoniques (tous ces sons ne sont, au départ, que des notes isolées jouées *forte*), et dynamiques (de l'attaque du son, avec toutes ses transitoires, à sa disparition où ne subsistent plus qu'un ou deux partiels, parfois très éloignés du fondamental). Nous avons ensuite isolé les accords et changements internes : ceux-ci ont constitué de nouveaux matériaux d'enregistrement, donnant lieu à plusieurs types d'interpolations réalisées grâce à Diphone, logiciel développé à l'Ircam par Xavier Rodet et Adrien Lefèvre. Ces harmonies ont enfin été utilisées pour l'écriture des parties de synthèse pure à l'aide du logiciel Csound. Ainsi, les sons de synthèse de la partie électronique sont eux aussi modifiés par morphing et synthèse croisée par des sons instrumentaux (percussion et piano) ; par exemple, l'on peut entendre des sons de synthèse croisés avec des partiels isolés de glockenspiel, ou éventuellement des sons sinusoïdaux croisés avec les sons des interpolations issus de différentes résonances complexes de piano.

*Philippe Leroux et Carl Faia.*

Version documentation creation date: Jan. 23, 2024, 5:25 p.m., update date: Jan. 26, 2024, 2:11 p.m.